
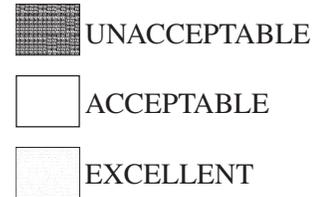


# HOW TO FIND THE OPTIMUM COMBINATION OF STUD SIZE AND BASE METAL THICKNESS IN ORDER TO PREVENT REVERSE-SIDE MARKING

## BASE METAL THICKNESS

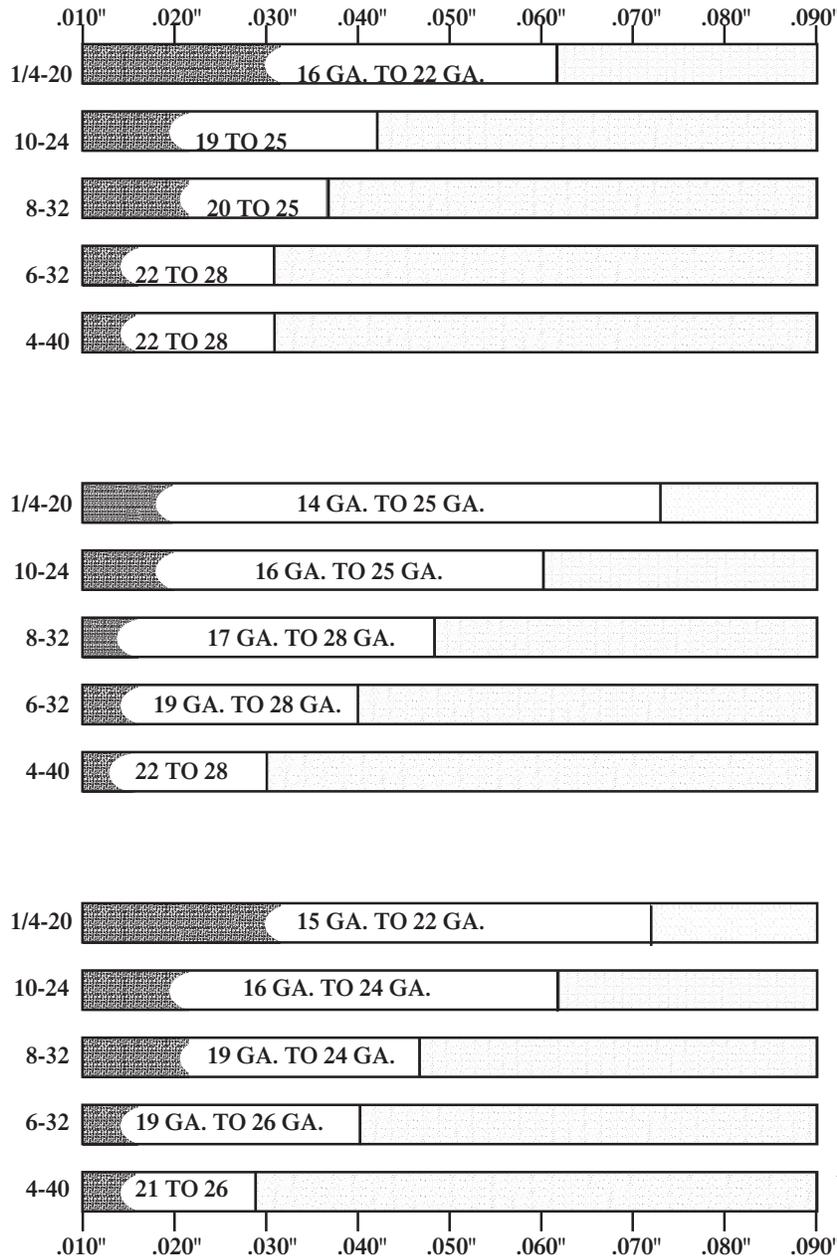

**MILD STEEL**  
 BASE METAL: Mild Steel  
 STUD: Mild Steel, Flanged or Small Flanged

**STAINLESS STEEL**  
 BASE METAL: Stainless Steel  
 STUD: Stainless Steel, Flanged or Small Flanged

**ALUMINUM**  
 BASE METAL: Aluminum  
 STUD: Aluminum, Flanged or Small Flanged

NOTE: Stud tip size can influence the degree of reverse-side marking.

## BASE METAL THICKNESS



450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174  
[www.midwestfasteners.com](http://www.midwestfasteners.com)